

ASSEMBLY INSTRUCTION**1AGNL or C**




WIDESPREAD LAVATORY SET

**1AGNL****1AGNC****REMOVAL OF FAUCET:**


Always turn the water supply off before removing the existing faucet or disassembling a valve. Open both faucet handles to relieve water pressure and to ensure that the water has been successfully turned off.

CARE OF FAUCET:


The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.

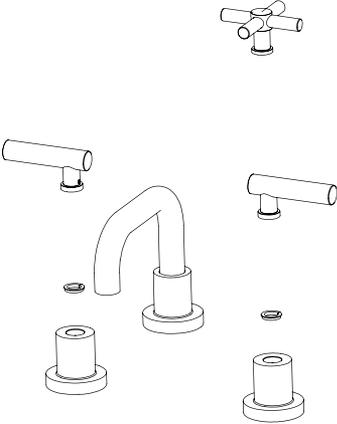

1


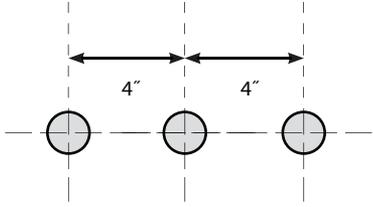



HOLE SIZE
Ø 1 3/8 "

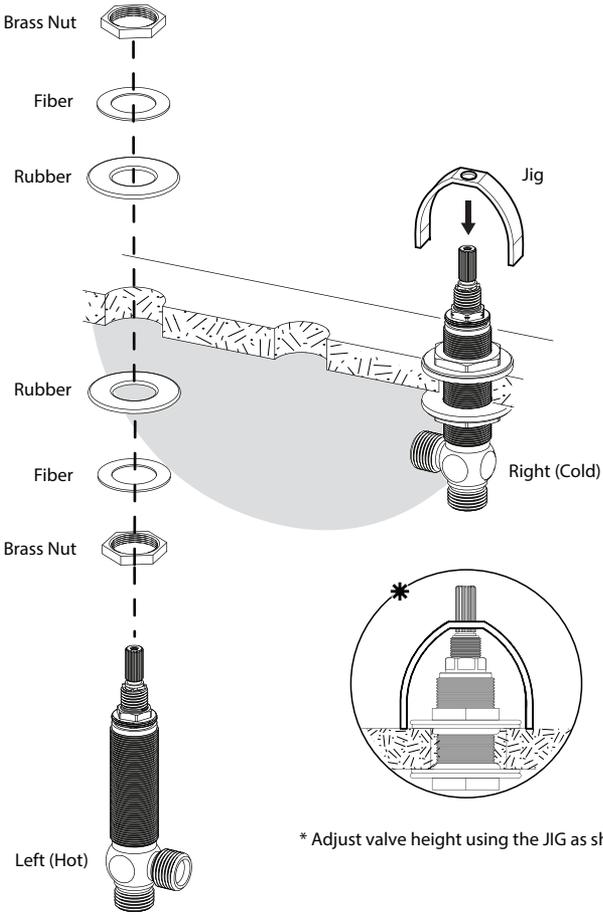




* Adjust valve height using the JIG as shown

2

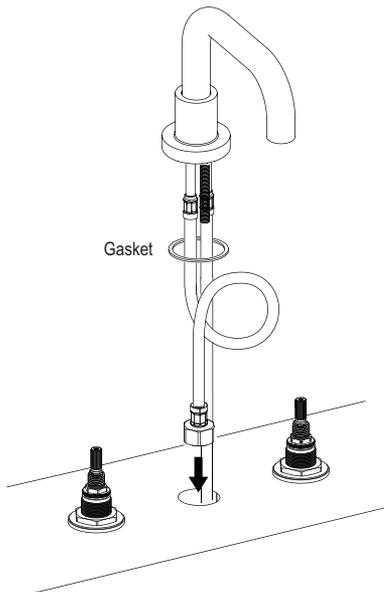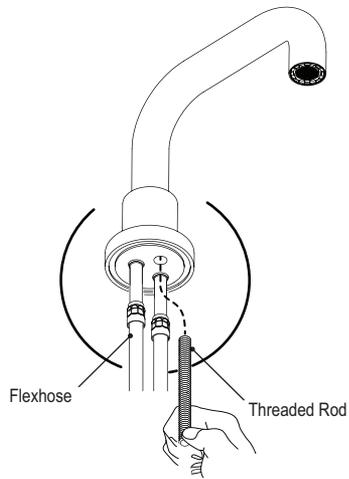


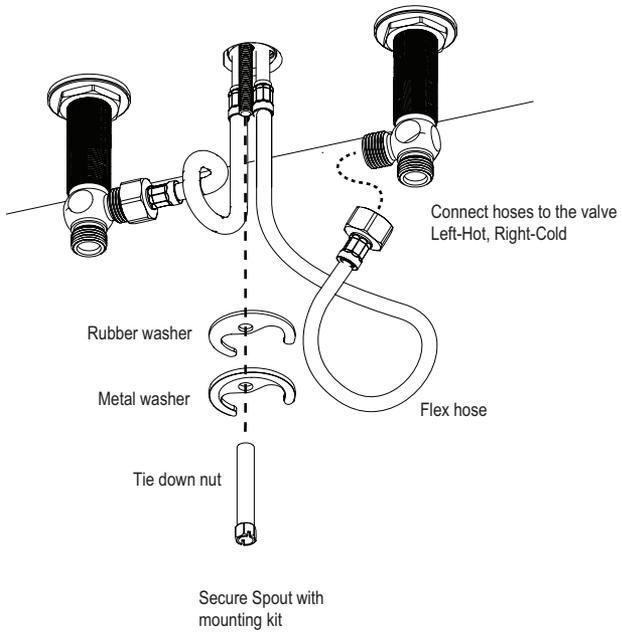


Tighten set screws




Turn Cartridge to the off position for handle alignment

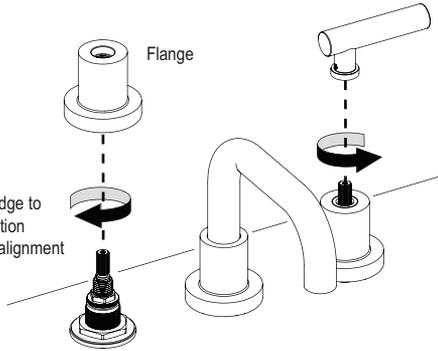


Tighten valve nut and connect water supplies



AERATOR REMOVAL







Turn counter-clock wise to unscrew.



FEATURES:

- Brass construction with choice of 22 finishes
- Two lever or cross handles
- Quarter turn Ceramic Disk cartridges
- 1.2 gpm @ 60 psi (Helps meet CalGreen regulation)

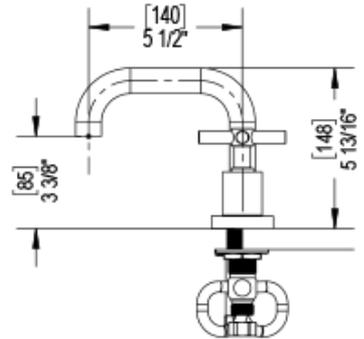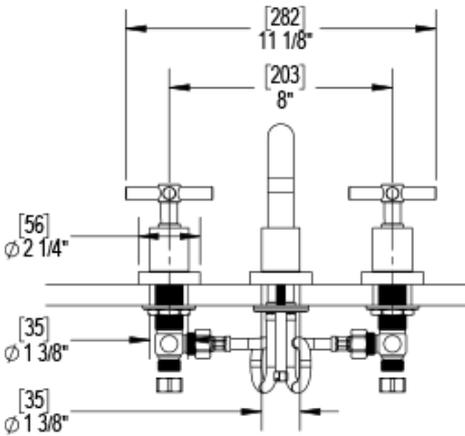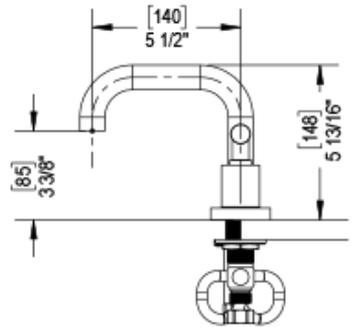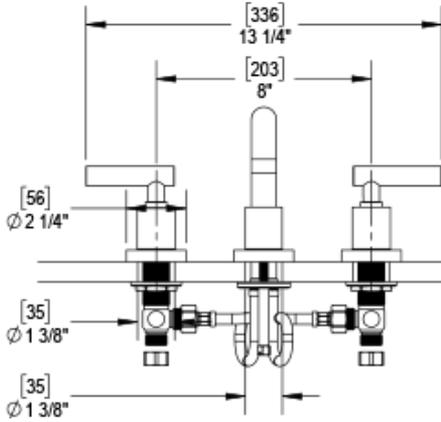

CONTACT US:

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com